
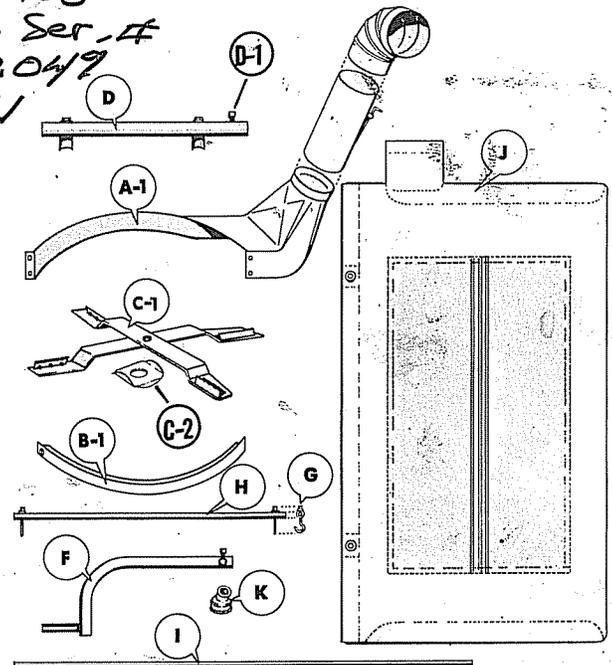
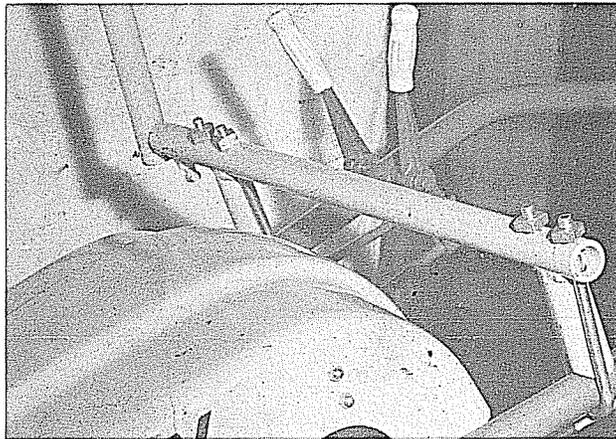


# Installation Instructions

## The GRAVELY Tractor LEAF-AWAY Attachment

Mod # LB  
Tractor Ser. #  
2M42049  
J 7741

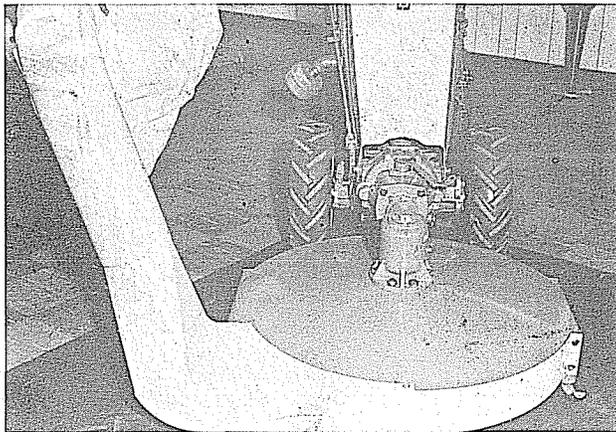

Step 1. Remove original cutting blade(s) (C).

Step 2. Mount Blade Shroud (B-1) to Rear Guard. The 90° angle is toward the outside, fitted tightly to bottom of Rear Guard. Shroud is attached by drilling three 1/4-inch holes in Guard and attaching with bolts provided (Removal of Shroud after initial installation is not necessary unless cutting blades are adjusted to cut closer than two inches).

Step 3. In place of Cutting Blade or Blades, install supplied Mower Blade Blowers (C-1). Fix Blowers at 90° angle to each other by inserting Spacing Washer (C-2) between 2 blades. Secure Collars.

Step 4. Remove Front Guard (A) and mount Chute Elbow Assembly (A-1). Proper fitting may require Runner on discharge side to be bent down.

Step 5. Mount Handle Bar Support (D) with set screw (D-1) extending out on muffler side of tractor. Affix to handle bars

with "U" bolts provided. Handle Bar Support must be exactly square with tractor to insure alignment of Pouch opening and Elbow.

Step 6. Insert Pouch Support Arm (F) into Handle Bar Support extending exactly upright. Tighten set screw on Handle Bar Support.

Step 7. Insert Pouch Support (H) in hole through Pouch Support Arm (F) by removing one Pouch Hook Bolt (G) from Pouch Support.

Step 8. Remove metal screws from Elbow Assembly (A-1) and attach Chute Cleaner Assembly with same screws.

Step 9. Slide Pouch Rod (I) in slotted opening of Vacuum Pouch (J).

A. Close each end of Pouch's slotted opening with staple.

B. Mount Pouch on Pouch Rod Hooks (G) and adjust so Pouch opening fits Elbow. Snap Pouch into place on Elbow.

C. Tighten set screws on Pouch Hook Bolts (G). Hooks should extend outward for easy removal of Pouch.

Step 10. Remove Muffler. Install 1" pipe nipple with 45° Elbow (K) pointing toward the front of tractor. Reinstall Muffler.